NAD 500, 750, 1000 v4

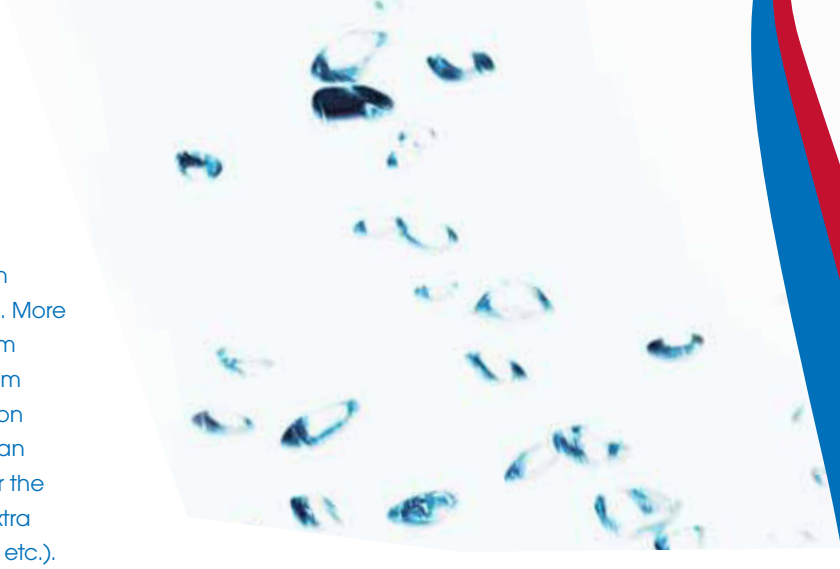

NAD storage vessels may be provided with a flange with 210 mm screw spacing for a TPK heating unit installation. More than one flange may be installed. The tank has two 1.5 m exchangers for the connection of another heating system (solar, for example). Changes in the number and location of couplings are optionally available. A 6/4" coupling can be added on top of the exchanger of a NAD v4 tank for the addition of a TJ 6/4" electrical heating unit to provide extra heating (for example, with solar collectors, heat pumps, etc.). The flange is plugged in the basic design. Storage vessels may be supplied with 100 mm thick polyurethane foam (molitan) insulation.

Maximum pressure in the tank	**0.3 MPa**
Maximum heating water temperature in the tank	**90 °C**
Maximum pressure in the exchanger	**1 MPa**
Maximum heating water temperature in the exchanger	**110 °C**

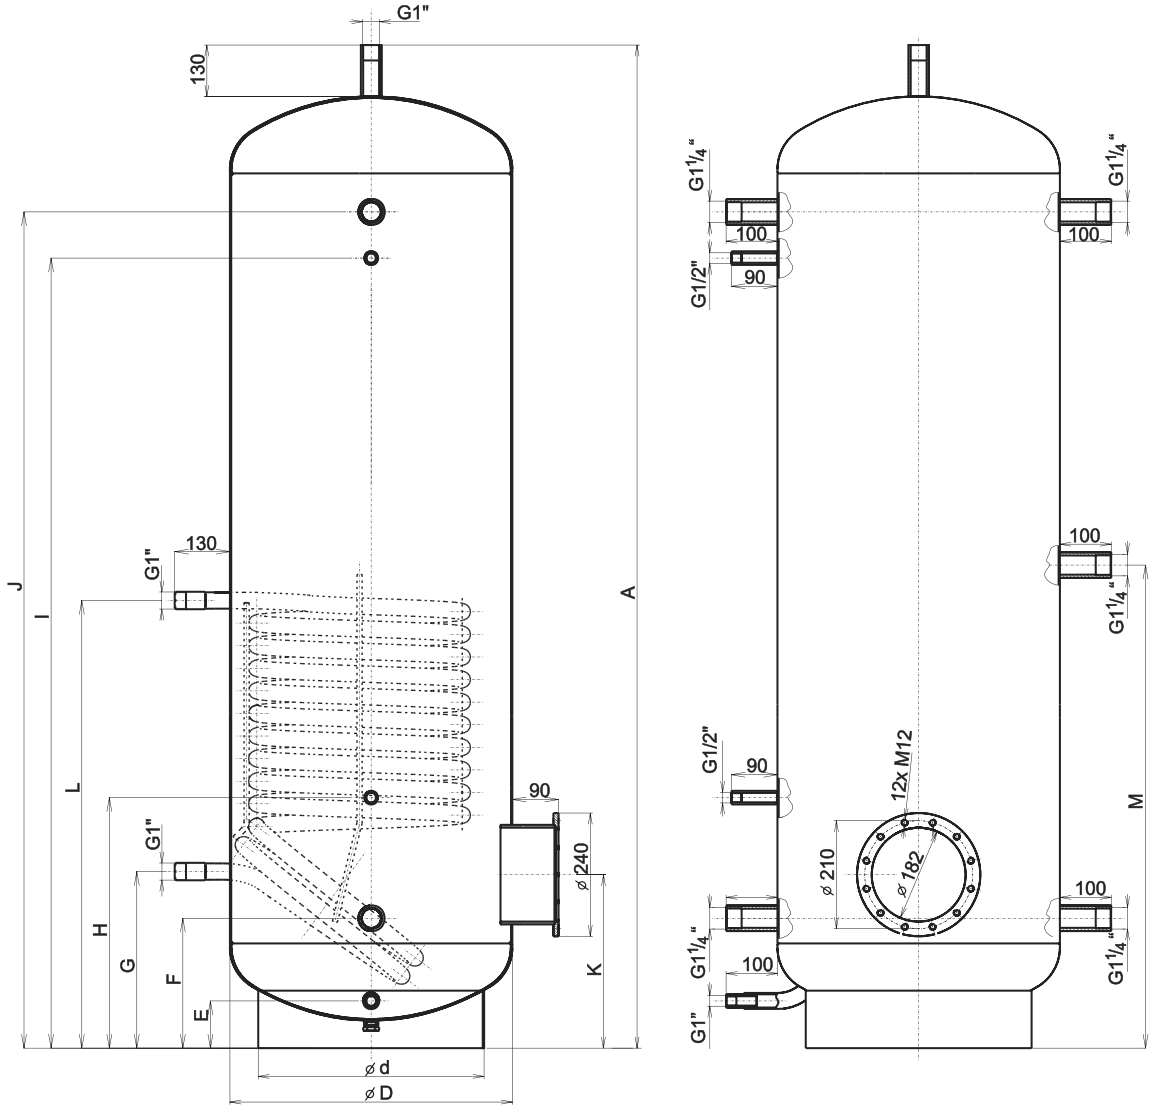

Volume (l)	Diameter D (mm)	A	E	F	G	H	I	J	K	L	M
500	**600**	1990	90	260	350	494	1545	1635	344	878	948
750	**750**	2020	90	272	362	506	1557	1647	356	890	960
1000	**850**	2053	90	287	377	521	1572	1662	371	905	975