


NAD 500, 750, 1000 v5

NAD storage vessels may be provided with a flange with 210 mm screw spacing for a TPK heating unit installation. More than one flange may be installed. The tank has two 1.5 m² exchangers for further heating system connection (for example, SOLAR). Changes in the number and location of couplings are optionally available. A coupling 6/4" can be added on top of the exchanger of a NAD v5 tank for the addition of a TJ 6/4" electrical heating unit to provide extra heating (for example, with solar collectors, heat pumps, etc.). The flange is plugged in the basic design. Storage vessels may be supplied with 100 mm thick polyurethane foam (molitan) insulation.



Maximum pressure in the tank	0.3 MPa
Maximum heating water temperature in the tank	90 °C
Maximum pressure in the exchanger	1 MPa
Maximum heating water temperature in the exchanger	110 °C

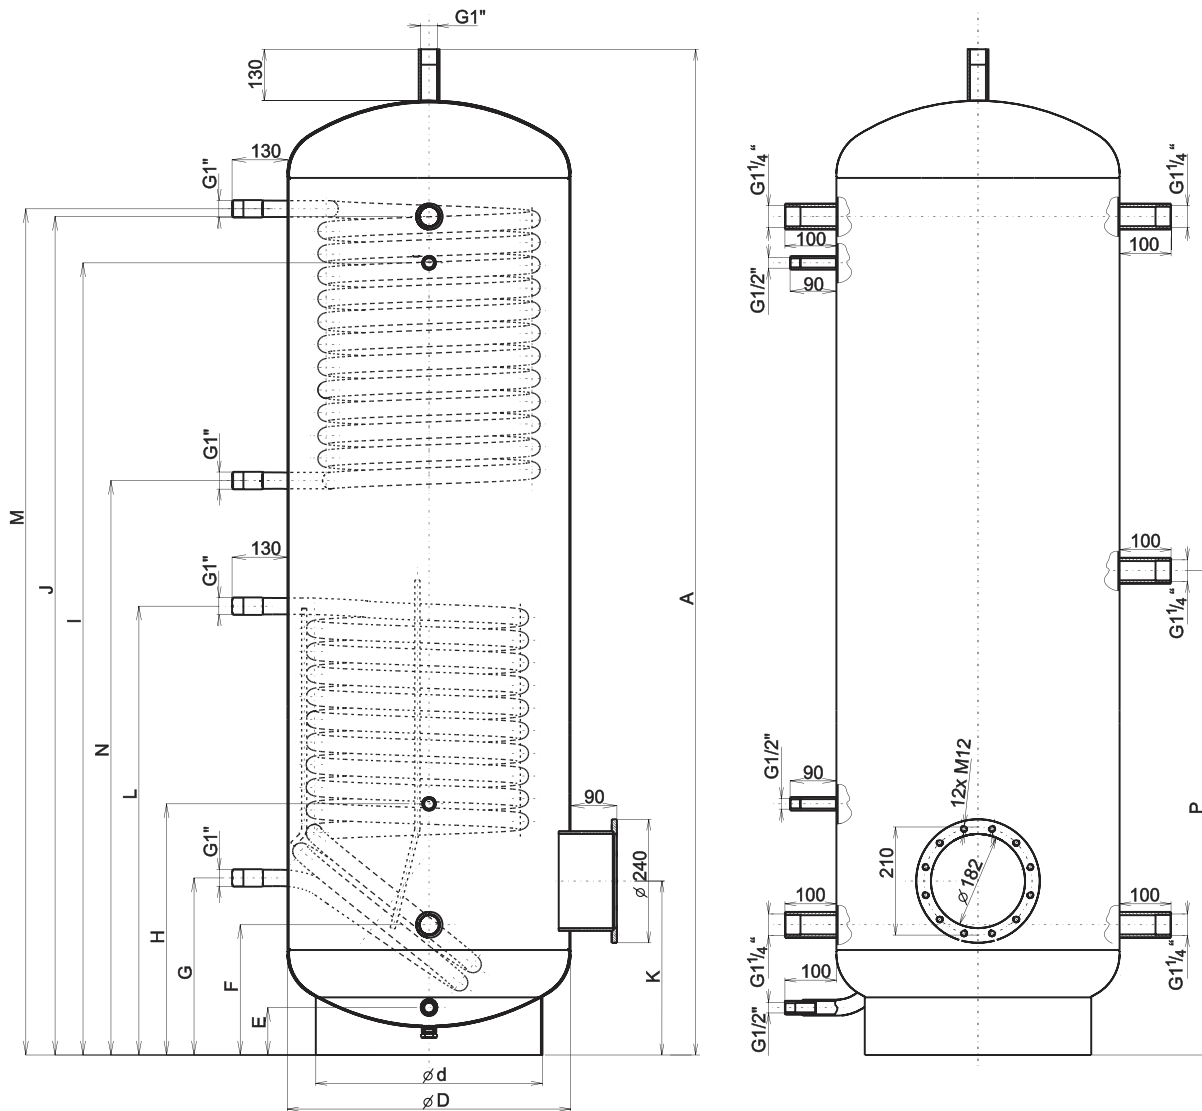

Volume (l)	Diameter D (mm)	A	E	F	G	H	I	J	K	L	M	N	P
500	600	1990	90	260	350	494	1545	1635	344	875	1650	1119	948
750	750	2020	90	272	362	506	1557	1647	356	887	1662	1131	960
1000	850	2053	90	287	377	521	1572	1662	371	902	1677	1146	975